

LIFTING & HANDLING EQUIPMENT




LIFTING & HANDLING EQUIPMENT


YOUR EMBEDDED MECHATRONIC SOLUTIONS




OUR CATALOGS

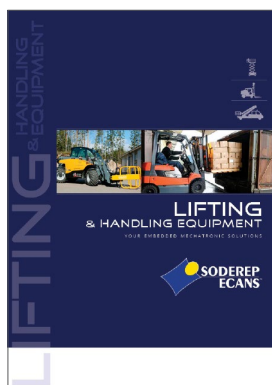


LIFTING & HANDLING EQUIPMENT




ADR TRANSPORT OF DANGEROUS GOODS



AGRICULTURE



CONSTRUCTION



GOODS TRANSPORT



MARINE



PASSENGERS TRANSPORT



QUARRYING & MINING



SPECIAL VEHICLES & MACHINERY



CONTENTS

BATTERY MASTER SWITCH ELECTRICAL CONTROL	3
BATTERY MASTER SWITCH MANUAL CONTROL	7
POWER RELAY	21
SWITCH AND BUTTON	23
SPARE PARTS	27

WAREHOUSING
& EQUIPMENT
SOLUTIONS



BATTERY MASTER SWITCH ELECTRICAL CONTROL

BISTABLE

SINGLE POLE



S250 4



S260 5

300 A

BATTERY MASTER SWITCH - ELECTRICAL CONTROL
BISTABLE - SINGLE POLE

S250 SERIES



GLOBAL PRODUCT



202319



202664

GENERAL CHARACTERISTICS

IP65	+85°C -40°C	PBT Reinforced	1000g	M10
------	----------------	-------------------	-------	-----

Continuous rating 300 A
Overload 1500 A (15 s)

VERSIONS

MASTER or SLAVE
GROUND CUT-OFF or POSITIVE CUT-OFF
12 V or 24 V

OPTIONS

Auxiliary circuit
Temporization
Low Voltage Monitoring (LVM)

CONTROL SWITCHES (see «Switch and button» section)

PUSH BUTTON SWITCH
S700 SERIES 202170
2-Pin ISO 15170 / DIN 72585

To use with:
See product selection table



ON-OFF SWITCH
S701 SERIES 250254
2-Pin ISO 15170 / DIN 72585

To use with:
See product selection table



BATTERY MASTER SWITCH - ELECTRICAL CONTROL BISTABLE - SINGLE POLE

S250 SERIES

PRODUCT SELECTION

MASTER									
P/N	VOLT	TERMINALS		POLARITY	AUXILIARY CIRCUIT	LVM	TEMPORIZATION	CONTROL TYPE	CONNECTION
		LENGTH	MATERIAL						
202301	12 V	13 mm	Copper	+ CUT-OFF	-	-	-	2 push buttons	3 wires
202310	24 V	10 mm	Silver plated copper	+ CUT-OFF	Relay D+	-	-	ON-OFF	4 wires
202311	12 V	10 mm	Silver plated copper	+ CUT-OFF	Relay D+	-	-	ON-OFF	4 wires
202316	24 V	10 mm	Silver plated copper	+ CUT-OFF	Relay D+	-	-	2 push buttons	4 wires
202317	12 V	10 mm	Silver plated copper	+ CUT-OFF	Relay D+	-	-	2 push buttons	4 wires
202319	24 V	10 mm	Silver plated copper	+ CUT-OFF	D+	-	-	ON-OFF	4-Pin, DIN connector
202595	12 V	10 mm	Silver plated copper	+ CUT-OFF	Relay control output for D+	60 sec	-	Monostable	7-Pin, DIN connector
202597	24 V	10 mm	Silver plated copper	+ CUT-OFF	Relay control output for D+	60 sec	-	Monostable	7-Pin, DIN connector
202636	12 V	10 mm	Silver plated copper	+ CUT-OFF	D+	-	-	ON-OFF	4-Pin, DIN connector
202637	12 V	10 mm	Silver plated copper	+ CUT-OFF	Relay control output for D+	5 min	-	Monostable	7-Pin, DIN connector
202639	24 V	10 mm	Silver plated copper	+ CUT-OFF	Relay control output for D+	5 min	-	Monostable	7-Pin, DIN connector
202698	12 V	10 mm	Silver plated copper	+ CUT-OFF	D+	-	30 s	ON-OFF	4 wires
202800	24 V	10 mm	Silver plated copper	GND CUT-OFF	Relay control output 200 mA	-	30 s	ON-OFF	5-Pin, Superseal connector
202976	12 V	10 mm	Silver plated copper	GND CUT-OFF	-	-	30 s	ON-OFF	2-Pin, Superseal connector
203035	24 V	10 mm	Silver plated copper	+ CUT-OFF	-	-	5 min	ON-OFF	2-Pin, Superseal connector

On request: specific technical demand can be studied

SLAVE									
P/N	VOLT	TERMINALS		POLARITY	AUXILIARY CIRCUIT	LVM	TEMPORIZATION	CONTROL TYPE	CONNECTION
		LENGTH	MATERIAL						
202664	12 V	10 mm	Silver plated copper	GND CUT-OFF	-	-	-	ON-OFF	2 wires
202665	24 V	10 mm	Silver plated copper	GND CUT-OFF	-	-	-	ON-OFF	2 wires

On request: specific technical demand can be studied

ACCESSORIES (see « Spare parts» section)

CABLING KIT

713 SERIES
2-Pin Superseal connector & wire

250351

713 SERIES
5-Pin Superseal connector & wire

250350

713 SERIES
4-Pin DIN connector

250333

713 SERIES
7-Pin DIN connector

250352

TERMINAL INSULATION CAP

900 SERIES
Red

201010

900 SERIES
Black

202499

TERMINAL HEIGHTENED

900 SERIES

200588

BATTERY MASTER SWITCH - ELECTRICAL CONTROL BISTABLE - SINGLE POLE

S260 SERIES



GLOBAL PRODUCT



202710

GENERAL CHARACTERISTICS

IP67 IPX9K	+85°C -40°C	PBT glass filled	850g	M10
---------------	----------------	------------------------	------	-----

- Continuous rating 300 A
- Overload 1500 A (15 s)
- Temporization 2.5 s
- Positive Cut-off

VERSIONS

12 V or 24 V

PRODUCT SELECTION

P/N	VOLT	TERMINALS		AUXILIARY CIRCUIT		TEMPORIZAZION	CONNECTION	CONTROL TYPE
		LENGTH	MATERIAL	TYPE	CONTINUOUS RATING			
202710	24 V	12 mm	Silver plated copper	D+	300 mA	2.5 s	7-Pin DIN type connector	ON-OFF
202712	12 V	12 mm	Silver plated copper	D+	300 mA	2.5 s	7-Pin DIN type connector	ON-OFF

On request: specific technical demand can be studied

CONTROL SWITCH (see «Switch and button» section)



ON-OFF SWITCH
S701 SERIES **202556**
4-Pin ISO 15170 / DIN 72585

To use with:
All the S260 SERIES

ACCESSORIES (see «Spare parts» section)

CABLING KIT
713 SERIES **250352**
7-Pin DIN connector with 3m
length cable

TERMINAL INSULATION CAP
900 SERIES **201010**
Red
900 SERIES **202499**
Black

TERMINAL HEIGHTENED
900 SERIES **200588**

BATTERY MASTER SWITCH MANUAL CONTROL

DOUBLE POLE



S190

8

S190 SERIES



GLOBAL PRODUCT



200014

GENERAL CHARACTERISTICS

IP65

+85 °C
-40 °C

Zinc
alloy

until
1200g

M10

Continuous rating until 300 A

Overload 2500 A (5 s)

Ground or positive Cut-off

OPTIONS

Auxiliary circuit

PRODUCT SELECTION

P/N	CONTINUOUS RATING	WEIGHT	HANDLE		TERMINALS			AUXILIARY CIRCUIT			
			TYPE	COLOR AND MATERIAL	LENGTH	MATERIAL	SPACER OF TERMINALS	TYPE	ACCESSORIES	CONTINUOUS RATING	CONNECTION
200014	250 A	1100 g	Fixed / 2 positions	Red thermoplastic	6 mm	Copper	Yes	D+	Shunt	10 A	1 x M6
200015	250 A	1100 g	Fixed / 2 positions	Red thermoplastic	12 mm	Copper	No	-	-	-	-
200018	250 A	1100 g	Fixed / 2 positions	Red thermoplastic	6 mm	Copper	Yes	Normally open	Shunt	10 A	1 x M6
200019	250 A	1100 g	Fixed / 2 positions	Red thermoplastic	6 mm	Copper	Yes	Normally open	-	10 A	2 x M6
200034	250 A	1100 g	Fixed / 2 positions	Red thermoplastic	15 mm	Copper	No	-	-	-	-
200232	250 A	1200 g	Fixed / 2 positions	Red thermoplastic	6 mm	Copper	Yes	-	-	-	-
200913	250 A	1110 g	«L» shape, removable in ON and OFF positions	Red thermoplastic	12 mm	Copper	No	-	-	-	-
201148	250 A	1150 g	High, removable in ON and OFF positions	Red thermoplastic	6 mm	Copper	Yes	-	-	-	-
201544	250 A	1100 g	Removable in ON and OFF positions	Red thermoplastic	12 mm	Copper	No	-	-	-	-
203098	300 A	1100 g	Fixed / 2 positions	Red thermoplastic	12 mm	Tin-plated copper	-	-	-	-	-

On request: specific technical demand can be studied



BATTERY MASTER SWITCH - MANUAL CONTROL DOUBLE POLE

S190 SERIES

ACCESSORIES (see «Spare parts» section)

HANDLE		TERMINAL INSULATION CAP	
901 SERIES For P/N 200913	200392	900 SERIES Red	201010
901 SERIES For P/N 201148	200929	900 SERIES Black	202499
901 SERIES For P/N 201544	201134	TERMINAL HEIGHTENED 900 SERIES	200588

BATTERY SWITCH
ELECTRICAL CONTROL

BATTERY SWITCH
MANUAL CONTROL

POWER RELAY

SWITCH AND BUTTON

ACCESSORIES AND
SPARE PARTS



LOGISTICS
& HANDLING
EQUIPMENT

LOGISTICS

BATTERY MASTER SWITCH MANUAL CONTROL

SINGLE POLE

	S9	12
	S10	13
	S20	14
	S30	16
	S50	17
	S100	18

BATTERY MASTER SWITCH - MANUAL CONTROL SINGLE POLE

S9 SERIES



GLOBAL PRODUCT



GENERAL CHARACTERISTICS

IP43	+80 °C -40 °C	Anodized Aluminium	200g	M10
Continuous rating 100 A				
Overload 500 A (10 s)				
Ground or positive Cut-off				

PRODUCT SELECTION

P/N	HANDLE		TERMINALS	
	TYPE	COLOR AND MATERIAL	LENGTH	MATERIAL
202373	Key removable in ON and OFF position	Red thermoplastic and steel key	10 mm	Copper

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

TERMINAL INSULATION CAP		PROTECTION CAPS	
900 SERIES Red	201010	900 SERIES	201898
900 SERIES Black	202499		
TERMINAL HEIGHTENED			
900 SERIES	200588		

S10 SERIES



GLOBAL PRODUCT



GENERAL CHARACTERISTICS

IP67 IP41	+80 °C -40 °C	PPO glass filled	150g	M10
--------------	------------------	---------------------	------	-----

- Continuous rating 100 A
- Overload 500 A (10 s)
- Ground or positive Cut-off

VERSIONS

IP67 or IP41

OPTIONS

Homologation

PRODUCT SELECTION

P/N	PROTECTION DEGREE	HOMOLOGATION	TERMINALS MATERIAL	TYPE OF HANDLE	ACCESSORIES
201767	IP67	ISO 8846 / ISO 10133	Copper	Removable in OFF position	-
201768	IP67	ISO 8846 / ISO 10133	Copper	Removable in OFF position	Chain
201831	IP67	ISO 8846 / ISO 10133	Tin-plated copper	Removable in OFF position	Tin-plated nuts
202365	IP41	-	Copper	Removable in OFF position	-
203201	IP67	ISO 8846 / ISO 10133	Copper	Removable in OFF position	Chain and protection cap

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

CHAIN	TERMINAL INSULATION CAP
900 SERIES 200894	900 SERIES Red 201010
RUBBER PROTECTION 900 SERIES 203243	900 SERIES Black 202499
HANDLE 901 SERIES 202474 For P/N 201767 - 201768 - 201831 - 202365 - 203201	TERMINAL HEIGHTENED 900 SERIES 200588



BATTERY MASTER SWITCH - MANUAL CONTROL SINGLE POLE

S20 SERIES



GLOBAL PRODUCT



200057

GENERAL CHARACTERISTICS



Continuous rating 150 A

Overload 1000 A (5 s)

VERSIONS

GROUND or POSITIVE CUT-OFF

OPTIONS

Homologation

Auxiliary circuit



200048



200801



BATTERY MASTER SWITCH - MANUAL CONTROL SINGLE POLE

S20 SERIES

PRODUCT SELECTION

P/N	PROTECTION DEGREE	FINISH	HANDLE		HOMOLOGATION	POLARITY	TERMINALS		AUXILIARY CIRCUIT		OPTION
			TYPE	COLOR AND MATERIAL			LENGTH	MATERIAL	TYPE	TERMINALS SIZE	
200021	IP54	Metallic	Fixed / 2 positions	Red thermoplastic	-	+ CUT-OFF	4 mm	Copper	Normally open	6.35 PIN	
200023	IP65	Metallic	Fixed / 2 positions	Black thermoplastic	ISO 8846	GND CUT-OFF	4 mm	Copper	-	-	
200048	IP65	White	Fixed / 2 positions	Red thermoplastic	ISO 8846 / ISO 10133	+ CUT-OFF	4 mm	Copper	-	-	
200049	IP65	White	Fixed / 2 positions	Black thermoplastic	ISO 8846	GND CUT-OFF	4 mm	Copper	-	-	
200057	IP40	Metallic	Fixed / 2 positions	Metallic	-	GND or + CUT-OFF	4 mm	Copper	Changeover switch	6.35 PIN	
200060	IP67	Metallic	Fixed / 2 positions	Metallic	ISO 8846 / ISO 10133	GND or + CUT-OFF	4 mm	Copper	-	-	
200061	IP67	Metallic	Removable in OFF position	Metallic	ISO 8846 / ISO 10133	GND or + CUT-OFF	4 mm	Copper	-	-	
200801	IP67	Metallic	Removable in OFF position	Metallic	ISO 8846 / ISO 10133	GND or + CUT-OFF	4 mm	Copper	-	-	Red protection cap
201363	IP65	Metallic	Fixed / 2 positions	Red thermoplastic	ISO 8846 / ISO 10133	+ CUT-OFF	4 mm	Copper	-	-	
201540	IP65	Metallic	Fixed / 2 positions	Red thermoplastic	ISO 8846 / ISO 10133	+ CUT-OFF	13 mm	Copper	-	-	
201543	IP65	Metallic	Fixed / 2 positions	Black thermoplastic	ISO 8846	GND CUT-OFF	13 mm	Copper	-	-	
202740	IP67	Metallic	Removable in OFF position	Metallic	ISO 8846 / ISO 10133	GND or + CUT-OFF	13 mm	Copper	-	-	
203185	IP67	Metallic	Removable in OFF position	Metallic	ISO 8846 / ISO 10133	GND or + CUT-OFF	4 mm	Copper	-	-	Black protection cap

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

HANDLE	TERMINAL INSULATION CAP
901 SERIES For P/N 200061 - 200801 - 202740	200700
901 SERIES For P/N 203185	203186
	900 SERIES Red
	201010
	900 SERIES Black
	202499
	TERMINAL HEIGHTENED
	900 SERIES
	200588

BATTERY SWITCH
ELECTRICAL CONTROL

BATTERY SWITCH
MANUAL CONTROL

POWER RELAY

SWITCH AND BUTTON

ACCESSORIES AND
SPARE PARTS



BATTERY MASTER SWITCH - MANUAL CONTROL SINGLE POLE

S30 SERIES



GLOBAL PRODUCT

GENERAL CHARACTERISTICS



203380



203250



203260

IP68 IPX9K	+85°C -40°C	PA66 glass filled	190g	M10
----------------------	----------------	-----------------------------	-------------	------------

- Continuous rating 275 A
- Overload 1250 A (10 s)
- Ground or positive Cut-off

PRODUCT SELECTION

P/N	FINISH	HANDLE		HOMOLOGATION	TERMINALS	
		TYPE	COLOR AND MATERIAL		LENGTH	MATERIAL
203250	Yellow	Removable in 3rd position «Padlock»	Red thermoplastic	ISO 8846 / ISO 10133	8,5 mm	Tin-plated copper
203253	Black	Removable in 3rd position «Padlock»	Yellow thermoplastic	ISO 8846	8,5 mm	Tin-plated copper
203260	White	Removable in 3rd position «Padlock»	Red thermoplastic	ISO 8846 / ISO 10133	8,5 mm	Tin-plated copper
203380	Black	Removable in 3rd position «Padlock»	Red thermoplastic	ISO 8846 / ISO 10133	8,5 mm	Tin-plated copper

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

HANDLE	TERMINAL INSULATION CAP
901 SERIES Red 203085	900 SERIES Red 201010
901 SERIES Yellow 203252	900 SERIES Black 202499
TERMINAL HEIGHTENED	INSULATION PLATE
900 SERIES 200588	900 SERIES Yellow 203249
	900 SERIES White 203259
	900 SERIES Black 203088

S50 SERIES



GLOBAL PRODUCT



GENERAL CHARACTERISTICS

IP68
+85°C / -40°C
PBT or Zinc alloy
500g
M10

Continuous rating 300 A
 Overload 3000 A (5 s)
 Ground or positive Cut-off

VERSIONS

FIXED or REMOVABLE HANDLE

PRODUCT SELECTION

P/N	FINISH	HOUSING	HANDLE		TERMINALS		POWER DROP	OPTION
			TYPE	COLOR AND MATERIAL	LENGTH	MATERIAL		
200027	Metallic	Zinc alloy	Removable in OFF position	Metallic	16 mm	Copper	50 mV max at 300 A	-
200028	Metallic	Zinc alloy	Removable in OFF position	Metallic	16 mm	Copper	50 mV max at 300 A	Chain
201900	Metallic	Zinc alloy	Removable in OFF position	Metallic	16 mm	Copper	50 mV max at 300 A	Chain + red protection cap
202500	Metallic	Zinc alloy	Removable in OFF position	Red metallic	16 mm	Copper	50 mV max at 300 A	Chain
203235	Black	PBT & Zinc alloy	Fixed / 2 positions	Red thermoplastic	16 mm	Tin-plated copper	-	-

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

HANDLE	TERMINAL INSULATION CAP
901 SERIES For P/N 200027	200993 900 SERIES Red
901 SERIES For P/N 200028 - 201900	202633 900 SERIES Black
901 SERIES For P/N 202500	202841 TERMINAL HEIGHTENED 900 SERIES
	201010 202499 200588

S100 SERIES



GLOBAL PRODUCT



200008



GENERAL CHARACTERISTICS

IP66	+85 °C -40 °C	Zinc alloy	until 650g	M10
------	------------------	------------	------------	-----

Continuous rating 250 A

Overload 2500 A (5 s)

VERSIONS

GROUND CUT-OFF or POSITIVE CUT-OFF

FIXED or REMOVABLE HANDLE



200010



200043

OPTIONS

Auxiliary circuit

S100 SERIES

PRODUCT SELECTION

P/N	FINISH	HANDLE		POLARITY	TERMINALS		AUXILIARY CIRCUIT			OPTION
		TYPE	COLOR AND MATERIAL		LENGTH	MATERIAL	TYPE	CONTINUOUS RATING	CONNECTION	
200000	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	20 mm	Copper	Normally open	10 A	1 x 6.35 + shunt	
200001	Metallic	Fixed / 2 positions	Red thermoplastic	GND CUT-OFF	7 mm	Copper	D+	10 A	1 M6 + shunt	
200004	Metallic	Removable in OFF position	Red thermoplastic	GND or + CUT-OFF	7 mm	Copper	D+	10 A	1 M6 + shunt	
200006	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	20 mm	Copper	Normally open	10 A	2 x 6.35	
200007	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	21 mm	Copper	Normally open	10 A	1 x 6.35 + shunt	Protection flap
200008	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	10 mm	Copper	-	-	-	
200010	Black	Fixed / 2 positions	Red thermoplastic	GND CUT-OFF	10 mm	Copper	-	-	-	
200011	Metallic	Removable in OFF position	Red thermoplastic	GND or + CUT-OFF	10 mm	Copper	-	-	-	
200012	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	13 mm	Copper	-	-	-	Protection flap
200031	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	13 mm	Copper	Normally open	10 A	1 x 6.35 + shunt	
200032	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	8 mm	Copper	Normally open	10 A	2 x 6.35	Rubber protection
200033	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	13 mm	Copper	-	-	-	
200043	Metallic	Fixed / 2 positions	Red metallic	GND or + CUT-OFF	10 mm	Copper	-	-	-	
201437	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	20 mm	Copper	D+	10 A	2 x 6.35	Rubber protection
202574	Metallic	Fixed / 2 positions	Red thermoplastic	GND or + CUT-OFF	10 mm	Copper	-	-	-	Rubber protection

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

HANDLE	200929	TERMINAL INSULATION CAP	
901 SERIES For P/N 200004 - 200011		900 SERIES Red	201010
		900 SERIES Black	202499
		TERMINAL HEIGHTENED	
		900 SERIES	200588



LOGISTICS
& EQUIPMENT
HANDLING

POWER RELAY NORMALLY OPEN

S500 SERIES



GLOBAL PRODUCT



GENERAL CHARACTERISTICS

IP65

+80°C
-30°C

Steel

550g

M8

Continuous rating 100 A

Overload until 600 A (5 s)

Ground or positive Cut-off

VERSIONS

12 V or 24 V

0.4 A to 0.7 A current consumption

PRODUCT SELECTION

P/N	SECONDARY CONTROL	VOLT	FINISH	OVERLOAD	TERMINALS		CONTROL CIRCUIT CONNECTION	CURRENT CONSUMPTION	TEMPORARY USE (4h max)
					LENGTH	MATERIAL			
201470	-	24 V	Black	500 A (5 s)	6 mm	Copper	2 x M5 studs	0.6 A	130 A
201480	-	12 V	Black	500 A (5 s)	6 mm	Copper	2 x M5 studs	0.5 A	150 A
201570	Manual control	24 V	Black	500 A (5 s)	6 mm	Copper	2 x M5 studs	0.5 A	150 A
201640	-	12 V	Black	600 A (5 s)	6 mm	Copper	2 x M5 studs	0.7 A	Permanent use
201660	-	24 V	Black	600 A (5 s)	6 mm	Copper	2 x M5 studs	0.4 A	Permanent use
202540	-	24 V	Black	600 A (5 s)	6 mm	Copper	2 x M5 studs	0.4 A	Permanent use

On request: specific technical demand can be studied

SWITCH AND BUTTON PUSH BUTTONS AND SWITCHES



SWITCH AND BUTTON PUSH BUTTON

S700 SERIES



GLOBAL PRODUCT



GENERAL CHARACTERISTICS

IP65

+85°C
-40°C

PA6
Glass reinforced

40g

Continuous rating 7 A

Overload until 25 A (10 s)

To use with:

S250 202301 - 202316 - 202317 - 202595 - 202597 - 202637
202639

PRODUCT SELECTION

P/N	NUMBER OF POLES	FINISH	AUXILIARY CIRCUIT
202170	Single pole	Red & Black	Normally open

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

CABLING KIT

S713 SERIES
4-Pin DIN connector

202326



SWITCH AND BUTTON ROTARY SWITCH

S701 SERIES



GLOBAL PRODUCT



GENERAL CHARACTERISTICS

IP65 IPX9K	+80 °C -40 °C	PA6 Glass reinforced	100g
----------------------	------------------	--------------------------------	-------------

Continuous rating 5 A

202556	To use with:
S260	202710 - 202712

250254	To use with:
S200	200358 - 200359 - 200439 - 200686 - 200735 - 200819 - 200820 - 200822 - 200824 - 201217 - 201245 - 201484 - 201497 - 201766 - 201926 - 202072 - 202136 - 202159
S220	203105 - 203106 - 203254 - 203255
S250	202310 - 202311 - 202319 - 202636 - 202664 - 202665 - 202698 - 202800 - 202976 - 203035

PRODUCT SELECTION

P/N	TYPE	FINISH	NUMBER OF POLES	ACCESSORIES	TERMINALS	CONNECTION
202556	Normally open	Red and black	Double pole	Yellow plate	Tin-plated copper	ISO 15170 / DIN 72585
202590	Inverser	Red and black	Double pole	Yellow plate	Tin-plated copper	ISO 15170 / DIN 72585
250254	Normally open	Red and black	Single pole	Yellow plate	Tin-plated copper	ISO 15170 / DIN 72585

On request: specific technical demand can be studied

ACCESSORIES (see «Spare parts» section)

CABLING KIT

S713 SERIES 4-Pin DIN connector	202326
------------------------------------	--------

BATTERY SWITCH
ELECTRICAL CONTROL

BATTERY SWITCH
MANUAL CONTROL

POWER RELAY

SWITCH AND BUTTON

ACCESSORIES AND
SPARE PARTS

S702 SERIES



GLOBAL PRODUCT



GENERAL CHARACTERISTICS

IP66

+85°C
-30°C

PPO
Glass
reinforced

150g

M8

Continuous rating 150 A

Overload until 500 A (10 s)

To use with:

S200 200358 - 200359 - 200439 - 200686 - 200735 - 200819
200820 - 200822 - 200824 - 201217 - 201245 - 201484
201497 - 201766 - 201926 - 202072 - 202136 - 202159

PRODUCT SELECTION

P/N	MARKING	FINISH	NUMBER OF POLES	ACCESSORIES
201601	French	Red and black	Single pole	Yellow plate
201859	English	Red and Black	Single pole	Yellow plate

On request: specific technical demand can be studied

ACCESSORIES AND SPARE PARTS

HANDLES AND ACCESSORIES	28
CONNECTION	35

ACCESSORIES AND SPARE PARTS
HANDLES AND ACCESSORIES

901 SERIES



HANDLE 200392

COLOR	MATERIAL
Red	Thermoplastic

To use with:
S190 200913



HANDLE 200700

COLOR	MATERIAL
Metallic	Zinc alloy

To use with:
S20 200061 - 200801 - 202740



HANDLE 200929

COLOR	MATERIAL
Red	Thermoplastic

To use with:
S100 200004 - 200011 - 201148

ACCESSORIES AND SPARE PARTS
HANDLES AND ACCESSORIES

901 SERIES



HANDLE 200993

COLOR	MATERIAL
Metallic	Zinc alloy

To use with:
S50 200027



HANDLE 201134

COLOR	MATERIAL
Red	Thermoplastic

To use with:
S190 201544



HANDLE 202474

COLOR	MATERIAL
Red	Thermoplastic

To use with:
S10 201767 - 201768 - 201831 - 202365 - 203201

BATTERY SWITCH
ELECTRICAL CONTROL

BATTERY SWITCH
MANUAL CONTROL


POWER RELAY

SWITCH AND BUTTON

ACCESSORIES AND
SPARE PARTS

ACCESSORIES AND SPARE PARTS
HANDLES AND ACCESSORIES

901 SERIES

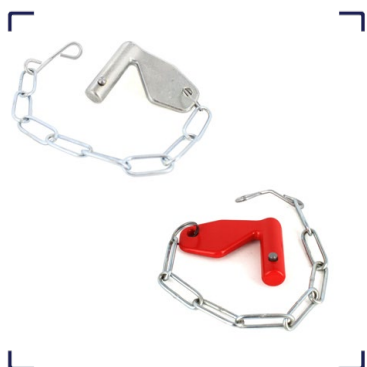

HANDLE (with chain)

P/N	COLOR	MATERIAL
202633	Metallic	Zinc alloy
202841	Red	Zinc alloy

To use with:

S50 200028 - 201900 - 202500



HANDLE

P/N	COLOR	MATERIAL
203085	Red	Thermoplastic
203252	Yellow	Thermoplastic

To use with:

S30 203250 - 203253 - 203260 - 203380



HANDLE (with rubber protection)

203186

COLOR	MATERIAL
Metallic	Zinc alloy

To use with:

S20 203185

S50 200027 - 200028 - 201900 - 202500

ACCESSORIES AND SPARE PARTS

HANDLES AND ACCESSORIES

900 SERIES



PROTECTION CAP 200802

COLOR	MATERIAL
Red	PVC

To use with:

- S9** 202373
- S20** 200061 - 200062 - 200801 - 202740 - 203185
- S50** 200027 - 200028 - 201900 - 202500



CHAIN 200894

COLOR	MATERIAL
Metallic	Steel

To use with:

- S10** 201768 - 203201
- S50** 200028 - 201900 - 202500



RUBBER PROTECTION 201549

COLOR	MATERIAL
Black	PVC

To use with:

- S20** 200061 - 200062 - 200801 - 202740 - 203185

ACCESSORIES AND SPARE PARTS
HANDLES AND ACCESSORIES

900 SERIES



PROTECTION CAPS 201898

COLOR	MATERIAL
Red	PVC

To use with:
S50 200027 - 200028 - 201900 - 202500



RUBBER PROTECTION 201899

COLOR	MATERIAL
Red	PVC

To use with:
S50 200027 - 200028 - 201900 - 202500



INSULATION PLATE

P/N	COLOR	MATERIAL
203088	Black	PA66
203249	Yellow	PA66
203259	White	PA66

To use with:
S30 203250 - 203253 - 203260 - 203380

ACCESSORIES AND SPARE PARTS
HANDLES AND ACCESSORIES

900 SERIES



PROTECTION CAP 203243

COLOR	MATERIAL
Red	PVC

To use with:
S20 200061 - 200062 - 200801 - 202740 - 203185



RUBBER PROTECTION 500123

COLOR	MATERIAL
Red	PVC

To use with:
S20 200061 - 200062 - 200801 - 202740 - 203185

BATTERY SWITCH
ELECTRICAL CONTROL

BATTERY SWITCH
MANUAL CONTROL

POWER RELAY

SWITCH AND BUTTON

ACCESSORIES AND
SPARE PARTS

ACCESSORIES AND SPARE PARTS CONNECTION

713 SERIES



CABLING KIT **202326**
4-Pin DIN connector

To use with:

- S700** 202170
- S701** 202590 - 250254
- S250** 202323



CABLING KIT **250025**
4-Pin Superseal connector

To use with:

- S220** 203105 - 203106 - 203254 - 203255



CABLING KIT **250333**
4-Pin DIN connector

To use with:

- S250** 202319 - 202636



ACCESSORIES AND SPARE PARTS CONNECTION

713 SERIES



CABLING KIT **250350**

5-Pin Superseal connector

To use with:

S250 202323



CABLING KIT **250351**

2-Pin Superseal connector

To use with:

S250 203035 - 202976



CABLING KIT **250352**

7-Pin DIN connector

To use with:

S250 202595 - 202597 - 202637 - 202639

S260 202710 - 202712

BATTERY SWITCH
ELECTRICAL CONTROL

BATTERY SWITCH
MANUAL CONTROL

POWER RELAY

SWITCH AND BUTTON

ACCESSORIES AND
SPARE PARTS

ACCESSORIES AND SPARE PARTS
CONNECTION

900 SERIES



TERMINALS HEIGHTENED

200588

COLOR	MATERIAL
Metallic	Brass

To use with:
M10 terminals



TERMINALS INSULATION CAP

P/N	COLOR	MATERIAL
201010	Red	PVC
202499	Black	PVC

To use with:
M10 terminals



BUSBAR

203213

TERMINALS SIZE	COLOR	MATERIAL
M8 x 3 (washers and nuts included)	Metallic	Tinned copper

To use with:
S220



EQUIPMENT

LIFTING & HANDLING EQUIPMENT



Information & photos are not contractual and can be modified without advance notice. Consult VIATEMIS for latest specifications. All rights of VIATEMIS are reserved

viatemis.com



YOUR EMBEDDED MECHATRONIC SOLUTIONS



 **Battery Master Switch**
TEMIS Solutions Group

125 Route de Paris . 03410 SAINT VICTOR . France
Tél +33(0)4 70 09 70 00 . Fax +33(0)4 70 09 70 09

SAS au capital de 200 000€ . APE 4690 Z
Siret 539 472 001 00012 . TVA FR 18 539 472 001

www.batterymasterswitch.com

 **VIATEMIS**
TEMIS Solutions Group

125 route de Paris
03410 SAINT-VICTOR - France
Tel : +33(0)4 70 08 26 00
Tel : +33(0)4 70 08 26 20
contact@viatemis.com